

**VEHICLE COVER KIT**

**P/N 92230022, 92230031, 92230036**

DESCRIPTION	QTY
VEHICLE COVER	1
STORAGE BAG	1

**Available separately from your dealer**

VEHICLE COVER LOCKING CABLE, PART NUMBER 12344218

Congratulations! You have purchased the finest vehicle cover available. We appreciate your commitment to keeping your vehicle in the best possible shape. By following these instructions, you will realize maximum effectiveness and longest life from your vehicle cover. Please read and follow these instructions carefully.


**Warning**

- Never use this cover on your vehicle after your vehicle has been painted within the last three months. The paint must cure completely for this period of time prior to installing your cover.
- Do not cover your vehicle when your vehicle is in-tow or when your vehicle is towed.
- Never expose your vehicle to high winds with the vehicle cover installed.
- Do not install the cover on a wet vehicle when the temperature is below freezing as the cover may freeze onto the vehicle.




Failure to observe these warnings will result in damage to your vehicle.

**Caution: Do not place cover near hot mufflers or exhaust pipes.**

1. Installing your vehicle cover – Once the engine has been turned off, allow the vehicle to cool for at least 20 minutes before installing your cover.
2. Remove the cover from the storage bag, unroll the cover across the hood, find the label that identifies the front of the cover.

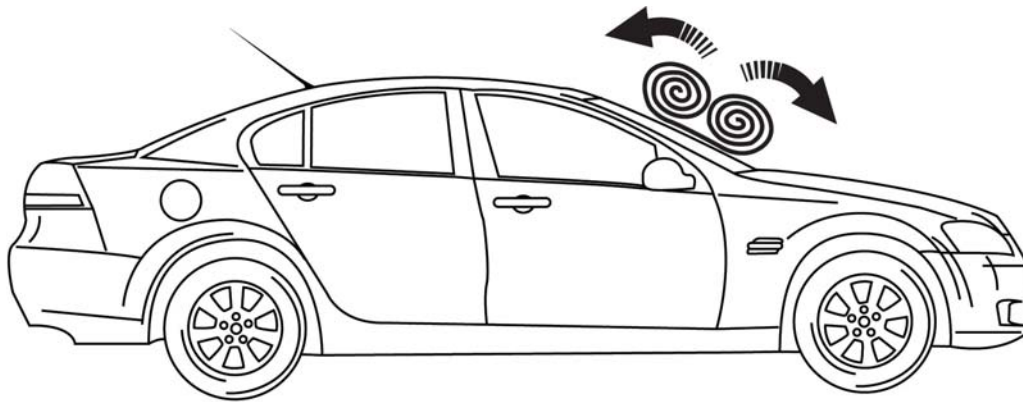

3. Once oriented correctly, open out the cover and fit the cover over the side view mirrors, pull the cover over the rear of the vehicle and pass the vehicle antenna through the antenna hole in the cover. Once the cover is situated correctly on the antenna, pass the cover down over the rear of the vehicle.
4. Pull the front of the vehicle cover over the front of the vehicle.
5. For vehicles with deck lid spoilers, unzip and extend the flap found inside.

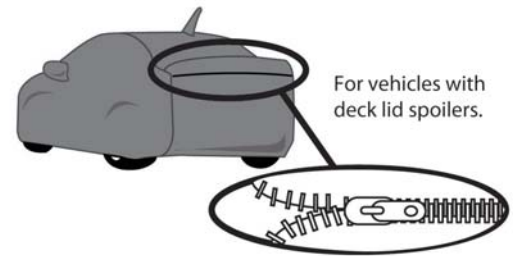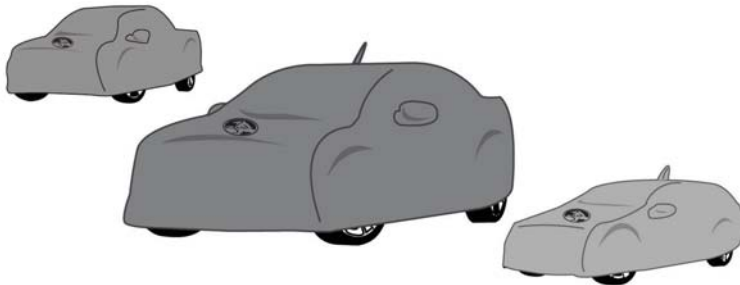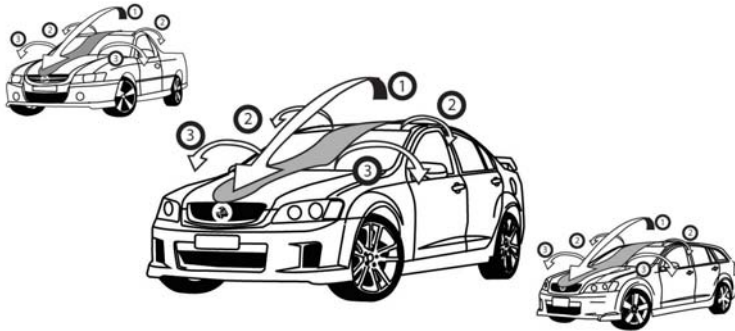

**Removal of the cover**

1. To remove the cover, release the front edge of the cover from under the vehicle and fold the cover in 16" sections to the back of the vehicle until you are at the windshield. Repeat the operation for the rear part of the cover and fold onto the front part of the cover.
2. Release the mirrors from the cover, fold one side of the cover to the center of the vehicle and roll the cover up. Place the cover in its storage bag.

**NOTE:** If the cover is re-installed from the same side of the vehicle, you only need to place the cover in the middle of the vehicle and unroll the cover towards you. The cover will be oriented correctly to the vehicle.

**Care and Cleaning:**

If an area becomes soiled, use an all-purpose cleaner to rub it out, and then rinse the area with water. If the entire cover needs to be cleaned, wash it in a large-capacity washer with a mild cleaner, cold water, but no softener. Dry in either a commercial dryer with low heat setting or on an outdoor clothesline.